

Lifecycle Stages of a WoolGuard Hood Filter






Filters are starting to show grease accumulation. Notice the "ribs" of the baffle filter becoming visible.



Filter becomes darker as it captures more grease.

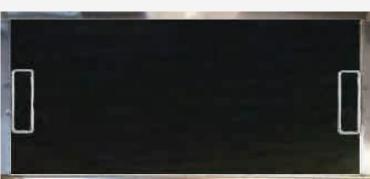

The "ribs" are no longer visible.
This filter needs to be replaced.

New WoolGuard





Change-out Filter in 5 Steps

Step 1 Remove Frame



Grip the handles firmly to safely remove the filter from the hood.

Step 2 Separate Frame



Grab one handle and the back of the frame and pull to separate the components.

Step 3 Dispose Filter



Dispose of used filter in standard trash. Wool is biodegradable, there is no special disposal required.

Step 4 Install New Filter



Place a new filter on top of the frame and then "snap" the cover in place by lining up the nipples and dimples on the sides of the filter.

Step 5 Re-Install Baffle



Using the handles, place the filter back into your system. Make sure the handles are on the sides (not top/bottom).

Have questions? Please call us at 310.823.6633